


SAFETY



AND LIFTING

FICHA TÉCNICA ESTROBO DE CABLE

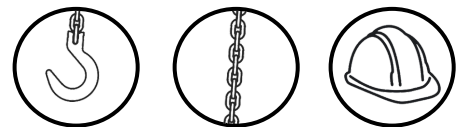

Adaptamos nuestros estrobo según las necesidades de cada cliente. Ya sea que tengan uno, dos, tres o cuatro ramales, los estrobo pueden solicitarse con los accesorios mostrados para los extremos.



Diámetro de cable (Nominal)		Axial	60°	45°	30°		
Pulg.	mm	T.M.	T.M.	T.M.	T.M.		
6,50	1/4"	0,60	0,44	1,19	1,03	0,84	0,60
8,00	5/16"	0,90	0,67	1,81	1,56	1,27	0,90
9,50	3/8"	1,32	0,98	2,84	2,28	1,86	1,32
11,00	7/16"	1,78	1,32	3,56	3,08	2,51	1,78
13,00	1/2"	2,50	1,85	5,00	4,33	3,53	2,50
14,50	9/16"	3,08	2,28	6,18	5,33	4,34	3,08
16,00	5/8"	3,80	2,81	7,60	6,57	5,36	3,80
19,00	3/4"	5,46	4,04	10,92	9,45	7,70	5,46
22,00	7/8"	7,44	5,51	14,88	12,87	10,49	7,44
26,00	1"	9,72	7,19	19,44	16,82	13,71	9,72
29,00	1 1/8"	12,32	9,12	24,64	21,31	17,37	12,32
32,00	1 1/4"	15,18	11,23	30,36	26,26	21,40	15,18
35,00	1 3/8"	18,58	13,75	37,16	32,14	26,20	18,58
38,00	1 1/2"	21,90	16,21	43,80	37,89	30,88	21,90
45,00	1 3/4"	29,82	22,07	59,64	51,59	42,05	29,82
52,00	2"	37,10	27,45	74,20	64,18	52,31	37,10
57,00	2 1/4"	46,94	34,74	93,88	81,21	66,19	46,94
64,00	2 1/2"	56,86	42,08	113,72	98,37	80,17	56,86
70,00	2 3/4"	65,94	48,80	131,88	114,08	92,98	65,94
77,00	3"	78,36	57,99	156,72	135,56	110,49	78,36

FACTOR DE SEGURIDAD 5:1 - ASME B30.9



<https://safetylift.pe/>
ventas@safetylift.pe